

Product

MCT FRAME



MCT FRAME is a crimping tool frame for mobile tool die sets. Easily interchangeable crimp dies are kept together with a special pin to simplify handling. A wide range of crimp dies enables the user to cover all applications in just one tool frame.

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap

The part number is a reference to the frame without dies.

TECHNICAL DATA

Length: 234 mm/9.21"


Width: 31 mm/1.22"

Height: 64 mm/2.52"

Weight: 460 gr/1.23 lb


Description: Tool frame for mobile die sets.

Life span, cycles: 20,000

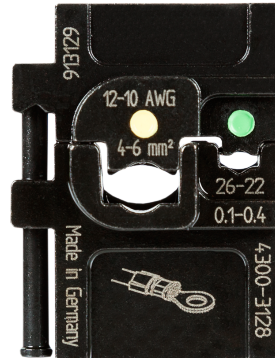


Mobile die set/4300-3128/AAA

Mobile die set for insulated connectors, 0.1-6 mm²/AWG 26-10 (green, yellow). This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.



Die profile



Crimp profile

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap.

The part number is a reference to the die set without frame.


TECHNICAL DATA

Length: 29 mm/1.14"
Width: 18 mm/0.71"
Height: 39 mm/1.54"
Weight: 66 gr/0.15 lb
Wire size: 0.1-6 mm² / AWG 26-10
Crimp dimensions mm/mm²:
 0.1 - 0.4 mm²/4 - 6 mm²
Crimp dimensions inch/AWG:
 AWG 26 - AWG 22/AWG 12 - AWG 10
Connector: Insulated connectors
Description: For pre insulated green and yellow connectors.
Life span, cycles: 20,000




Following dies are also available:

Pressmaster AB
P.O. Box 3, Industrivägen
SE-796 21 Älvdalen, Sweden
Tel: +46 (0)251-451 00
info@pressmaster.se
www.pressmaster.com

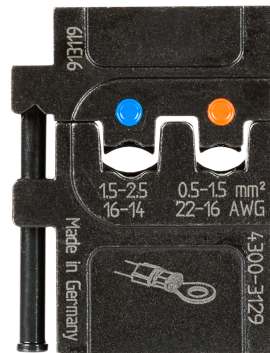


Mobile die set/4300-3129/AAA

Mobile die set for insulated connectors, 0.5-2.5 mm²/AWG 22-14 (red, blue). This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.



Die profile



Crimp profile

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap

The part number is a reference to the die set without frame.


TECHNICAL DATA

Length: 29 mm/1.14"
Width: 9.5 mm/0.37"
Height: 39 mm/1.54"
Weight: 75 gr/0.17 lb
Wire size: 0.5-2.5 mm² / AWG 22-14
Crimp dimensions mm/mm²:
 0.5 - 1.5 mm²/1.5 - 2.5 mm²
Crimp dimensions inch/AWG:
 AWG 22 - AWG 16/AWG 16 - AWG 14
Connector: Insulated connectors
Description: For pre insulated red and blue connectors.
Life span, cycles: 20,000



Following dies are also available:

Pressmaster AB
P.O. Box 3, Industrivägen
SE-796 21 Älvdalen, Sweden
Tel: +46 (0)251-451 00
info@pressmaster.se
www.pressmaster.com




Mobile die set/4300-3147/AAA


Mobile die set for Turned pin connectors, 0.14-4 mm²/AWG 26-12. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap

The part number is a reference to the die set without frame.



Die profile



Crimp profile

TECHNICAL DATA

Length: 29 mm/1.14"

Width: 10 mm/0.39"

Height: 39 mm/1.54"

Weight: 72 gr/0.16 lb

Wire size: 0.14-4 mm² / AWG 26-12

Crimp dimensions mm/mm²:

0.14 - 1.0 mm²/1.5 mm²/2.5 mm²/4 mm²

Crimp dimensions inch/AWG:

AWG 26 - AWG 18/AWG 16/AWG 14/AWG 12

Connector: Turned pin connectors


Description: For turned pin connectors.

Life span, cycles: 20,000



Following dies are also available:

Pressmaster AB
P.O. Box 3, Industrivägen
SE-796 21 Älvdalen, Sweden
Tel: +46 (0)251-451 00
info@pressmaster.se
www.pressmaster.com




Mobile die set/4300-3148/AAA


Mobile die set for Turned pin connectors 6-10 mm²/AWG 10-8. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap

The part number is a reference to the die set without frame.



Die profile



Crimp profile

TECHNICAL DATA

Length: 29 mm/1.14"

Width: 10 mm/0.39"

Height: 39 mm/1.54"

Weight: 66 gr/0.15 lb

Wire size: 6-10 mm² / AWG 10-8

Crimp dimensions mm/mm²:

6 mm²/10 mm²

Crimp dimensions inch/AWG:

AWG 10/AWG 8

Connector: Turned pin connectors

Description: For turned pin connectors.

Life span, cycles: 20,000



Following dies are also available:

Pressmaster AB
P.O. Box 3, Industrivägen
SE-796 21 Älvdalen, Sweden
Tel: +46 (0)251-451 00
info@pressmaster.se
www.pressmaster.com




Mobile die set/4300-3139/AAA


Mobile die set for non insulated connectors 4-10 mm²/AWG 12-8. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap

The part number is a reference to the die set without frame.



Die profile



Crimp profile

TECHNICAL DATA

Length: 32 mm/1.26"

Width: 10 mm/0.39"

Height: 39 mm/1.54"

Weight: 60 gr/0.13 lb

Wire size: 4-10 mm² / AWG 12-8

Crimp dimensions mm/mm²:

4 mm²/6 mm²/10 mm²

Crimp dimensions inch/AWG:

AWG 12/AWG 10/AWG 8

Connector: Uninsulated connectors

Description: For uninsulated copper

tube and copper sheet connectors.

Life span, cycles: 20,000



Following dies are also available:

Pressmaster AB
P.O. Box 3, Industrivägen
SE-796 21 Älvdalen, Sweden
Tel: +46 (0)251-451 00
info@pressmaster.se
www.pressmaster.com




Mobile die set/4300-3137/AAA


Mobile die set for non insulated connectors 0.50-2.5 mm²/AWG 22-14. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap.

The part number is a reference to the die set without frame.



Die profile



Crimp profile


TECHNICAL DATA

Length: 31 mm/1.22"
Width: 8 mm/0.31"
Height: 39 mm/1.54"
Weight: 68 gr/0.15 lb
Wire size: 0.5-2.5 mm² / AWG 22-14
Crimp dimensions mm/mm²:
 0.50 - 0.75 mm²/1.5 mm²/2.5 mm²
Crimp dimensions inch/AWG:
 AWG 22 - AWG 20/AWG 16/AWG 14
Connector: Uninsulated connectors
Description: For uninsulated copper tube and copper sheet connectors.
Life span, cycles: 20,000



Following dies are also available:

Pressmaster AB
P.O. Box 3, Industrivägen
SE-796 21 Älvdalen, Sweden
Tel: +46 (0)251-451 00
info@pressmaster.se
www.pressmaster.com

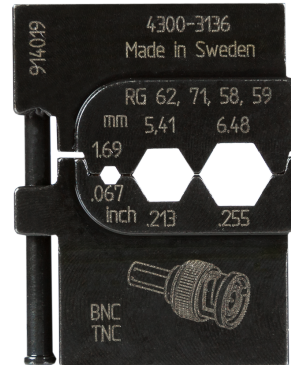


Mobile die set/4300-3136/AAA


Mobile die set for coaxial connectors RG 58, 59, 62, 71 BNC/TNC. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap.

The part number is a reference to the die set without frame.



Die profile



Crimp profile

TECHNICAL DATA

Length: 30 mm/1.18"

Width: 10 mm/0.39"

Height: 39 mm/1.54"

Weight: 72 gr/0.16 lb

Crimp dimensions mm/mm²:

1,69 mm HEX/5,41 mm HEX/6,48 mm HEX

Crimp dimensions inch/AWG:

0.067\0.213\0.255\

Connector: Coaxial connector

Description: For example BNC, TNC connectors on RG 58, 59, 62, 71.

Life span, cycles: 20,000

Cables: RG-108A/U, RG142B/U,

RG210/U, RG223/U, RG302/U,

RG58C/U, RG59B/U, RG62A/U,

RG62B/U, RG71B/U



Following dies are also available:

Pressmaster AB
P.O. Box 3, Industrivägen
SE-796 21 Älvdalen, Sweden
Tel: +46 (0)251-451 00
info@pressmaster.se
www.pressmaster.com




Mobile die set/4300-3142/AAA


Mobile die set for non insulated connectors 0.5-6 mm²/AWG 22-10. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap.

The part number is a reference to the die set without frame.



Die profile



Crimp profile

TECHNICAL DATA

Length: 29 mm/1.14"

Width: 8 mm/0.31"

Height: 39 mm/1.54"

Weight: 67 gr/0.15 lb

Wire size: 0.5-6 mm² / AWG 22-10

Crimp dimensions mm/mm²:

0.5 - 2.5 mm²/4 - 6 mm²

Crimp dimensions inch/AWG:

AWG 22 - AWG 14/AWG 12 - AWG 10

Connector: Uninsulated connectors


Description: For uninsulated copper tube and copper sheet connectors.

Life span, cycles: 20,000



Following dies are also available:

Pressmaster AB
P.O. Box 3, Industrivägen
SE-796 21 Älvdalen, Sweden
Tel: +46 (0)251-451 00
info@pressmaster.se
www.pressmaster.com

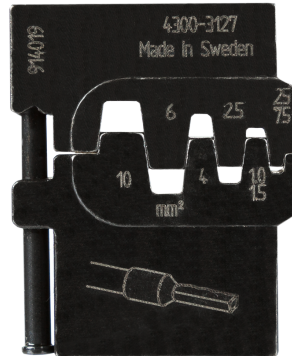


Mobile die set/4300-3127/AAA

Mobile die set for endsleeves 0.25-10 mm²/AWG 24-8. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap.

The part number is a reference to the die set without frame.

Following dies are also available:



Die profile



Crimp profile

TECHNICAL DATA

Length: 31 mm/1.22"

Width: 12 mm/0.47"

Height: 39 mm/1.54"

Weight: 86 gr/0.19 lb

Wire size: 0.25-10 mm² / AWG 24-8

Crimp dimensions mm/mm²:

0.25 - 0.75 mm²/1.0 - 1.5 mm²/2.5

mm²/4 mm²/6 mm²/10 mm²

Crimp dimensions inch/AWG:


AWG 24 - AWG 20/AWG 18 - AWG

16/AWG 14/AWG 12/AWG 10/AWG 8

Connector: Endsleeves

Description: For endsleeve connectors, both uninsulated and insulated.

Life span, cycles: 20,000

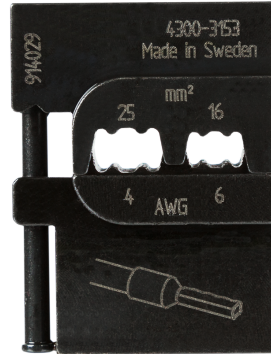


Mobile die set/4300-3153/AAA

Mobile die set for endsleeves 16-25 mm²/AWG 6-4. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.


- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap.

The part number is a reference to the die set without frame.

Following dies are also available:




Die profile



Crimp profile


TECHNICAL DATA

Length: 29 mm/1.14"
Width: 14.5 mm/0.57"
Height: 39 mm/1.54"
Weight: 87 gr/0.19 lb
Wire size: 16-25 mm² / AWG 6-4
Crimp dimensions mm/mm²:
 16 mm²/25 mm²
Crimp dimensions inch/AWG:
 AWG 6/AWG 4
Connector: Endsleeves
Description: For endsleeve connectors, both uninsulated and insulated.
Life span, cycles: 20,000




Mobile die set/4300-3154/AAA

Mobile die set for endsleeves 35-50 mm²/AWG 2-0. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.



Die profile



Crimp profile

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap

The part number is a reference to the die set without frame.

Following dies are also available:

TECHNICAL DATA

Length: 34 mm/1.34"

Width: 18 mm/0.71"

Height: 39 mm/1.54"

Weight: 86 gr/0.19 lb

Wire size: 35-50 mm² / AWG 2-0

Crimp dimensions mm/mm²:

35 mm²/50 mm²


Crimp dimensions inch/AWG:

AWG 2/AWG 0

Connector: Endsleeves


Description: For endsleeve connectors, both uninsulated and insulated.

Life span, cycles: 20,000



Mobile die set/4300-3150/AAA

Mobile die set for non insulated open barrel connectors 0.1-1 mm²/AWG 26-18. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.



Die profile



Crimp profile

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap.

The part number is a reference to the die set without frame.

TECHNICAL DATA

Length: 29 mm/1.14"

Width: 6 mm/0.24"

Height: 39 mm/1.54"

Weight: 72 gr/0.16 lb

Wire size: 0.1-1 mm² / AWG 26-18

Crimp dimensions mm/mm²:

0.1 - 0.25 mm²/0.25 - 0.5 mm²/0.5 - 1.0 mm²

Crimp dimensions inch/AWG:

AWG 26 - AWG 24/AWG 24 - AWG

22/AWG 22 - AWG 18

Connector: Uninsulated open barrel connectors


Description: For non insulated open barrel connectors.

Life span, cycles: 20,000




Following dies are also available:

Pressmaster AB
P.O. Box 3, Industrivägen
SE-796 21 Älvdalen, Sweden
Tel: +46 (0)251-451 00
info@pressmaster.se
www.pressmaster.com



Mobile die set/4300-3151/AAA

Mobile die set for non insulated open barrel connectors 0.5-2.5 mm²/AWG 22-14. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.



Die profile



Crimp profile

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap

The part number is a reference to the die set without frame.


TECHNICAL DATA

Length: 29 mm/1.14"
Width: 7 mm/0.28"
Height: 39 mm/1.54"
Weight: 63 gr/0.14 lb
Wire size: 0.5-2.5 mm² / AWG 22-14
Crimp dimensions mm/mm²:
 0.5 - 1.0 mm²/1.5 - 2.5 mm²
Crimp dimensions inch/AWG:
 AWG 22 - AWG 16/AWG 16 - AWG 14
Connector: Uninsulated open barrel connectors
Description: For non insulated open barrel connectors.
Life span, cycles: 20,000




Following dies are also available:

Pressmaster AB
P.O. Box 3, Industrivägen
SE-796 21 Älvdalen, Sweden
Tel: +46 (0)251-451 00
info@pressmaster.se
www.pressmaster.com

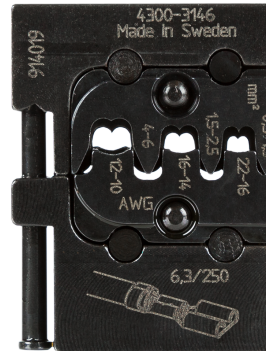

Mobile die set/4300-3146/AAA

Mobile die set for non insulated open barrel connectors 0.5-6 mm²/AWG 22-10. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.



Die profile



Crimp profile

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap

The part number is a reference to the die set without frame.

TECHNICAL DATA

Length: 29 mm/1.14"

Width: 10 mm/0.39"

Height: 39 mm/1.54"

Weight: 74 gr/0.16 lb

Wire size: 0.5-6 mm² / AWG 22-10

Crimp dimensions mm/mm²:

0.5 - 1.5 mm²/1.5 - 2.5 mm²/4 - 6 mm²

Crimp dimensions inch/AWG:

AWG 22 - AWG 16/AWG 16 - AWG

14/AWG 12 - AWG 10

Connector: Uninsulated open barrel connectors


Description: For non insulated open barrel connectors 6.3 mm/250V.

Life span, cycles: 20,000




Following dies are also available:

Pressmaster AB
P.O. Box 3, Industrivägen
SE-796 21 Älvdalen, Sweden
Tel: +46 (0)251-451 00
info@pressmaster.se
www.pressmaster.com




Mobile die set/4300-3141/AAA

Mobile die set for coaxial-/Fiberoptic: ST, SC, SMA, SMB, SFR. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.



Die profile




Crimp profile

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap.

The part number is a reference to the die set without frame.


TECHNICAL DATA

Length: 34 mm/1.34"
Width: 10 mm/0.39"
Height: 39 mm/1.54"
Weight: 76 gr/0.17 lb
Crimp dimensions mm/mm²:
 3.25 mm HEX/3.84 mm HEX/4.52 mm
 HEX/5.41 mm HEX
Crimp dimensions inch/AWG:
 0.128\0.151\0.178\0.213\0.250
Connector: Fiberoptic
Description: For example ST, SC,
 SMA, SMB, SFR.
Life span, cycles: 20,000

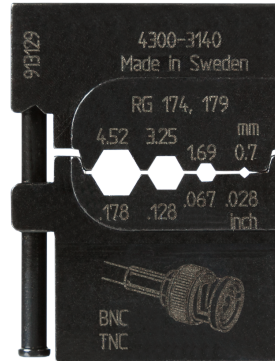


Mobile die set/4300-3140/AAA

Mobile die set for coaxial connectors: RG 174, RG 179/BNC/TNC. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.



Die profile



Crimp profile

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap.

The part number is a reference to the die set without frame.


TECHNICAL DATA

Length: 29 mm/1.14"
Width: 10 mm/0.39"
Height: 39 mm/1.54"
Weight: 73 gr/0.16 lb
Crimp dimensions mm/mm²:
 0.7 mm Sqr./1.69 mm HEX/3.25 mm
 HEX/4.52 mm HEX
Crimp dimensions inch/AWG:
 0.028\0.067\0.128\0.178\
Connector: Coaxial connector
Description: For example BNC,
 TNC connectors on RG 174, RG 179.
Life span, cycles: 20,000
Cables: RG122/U, RG174A/U,
 RG179B/U, RG180B/U, RG187A/U,
 RG188A/U, RG279/U, RG303/U,
 RG316/U




Following dies are also available:

Pressmaster AB
P.O. Box 3, Industrivägen
SE-796 21 Älvdalen, Sweden
Tel: +46 (0)251-451 00
info@pressmaster.se
www.pressmaster.com




Mobile die set/4300-3138/AAA

Mobile die set for coaxial connectors: CATV RG 6.59. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.



Die profile



Crimp profile

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap

The part number is a reference to the die set without frame.

Following dies are also available:

TECHNICAL DATA

Length: 34 mm/1.34"

Width: 10 mm/0.39"

Height: 39 mm/1.54"

Weight: 79 gr/0.17 lb

Crimp dimensions mm/mm²:

8.23 mm HEX/9.14 mm HEX

Crimp dimensions inch/AWG:

0.324\0.360\

Connector: Coaxial connector


Description: For example CATV connectors on RG 6.59.

Life span, cycles: 20,000

Cables: 1695, RG 6, RG143A/U,

RG212/U, RG222/U, RG6 Quad,

RG6A/U, TWINAX




Mobile die set/4300-3144/AAA

Mobile die set for RJ45 connectors 8/8, 8/6, 8/4. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap.

The part number is a reference to the die set without frame.

Following dies are also available:



Die profile

TECHNICAL DATA

Length: 29 mm/1.14"

Width: 17 mm/0.67"

Height: 39 mm/1.54"

Weight: 42 gr/0.09 lb

Crimp dimensions mm/mm²:

RJ 45

Crimp dimensions inch/AWG:

RJ 45

Connector: Modular plug

Description: 8/8, 8/6, 8/4

Life span, cycles: 20,000




Mobile die set/4300-3132/AAA

Mobile die set for RJ11 connectors 6/6, 6/4. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap

The part number is a reference to the die set without frame.

Following dies are also available:



Die profile

TECHNICAL DATA

Length: 29 mm/1.14"

Width: 14 mm/0.55"

Height: 39 mm/1.54"

Weight: 60 gr/0.13 lb

Crimp dimensions mm/mm²:

RJ 11


Crimp dimensions inch/AWG:

RJ 11

Connector: Modular plug

Description: 6/6, 6/4

Life span, cycles: 20,000




Mobile die set/4300-3262/AAA


Mobile die set for insulated heat shrink butt splice connectors, 0.32-6 mm²/AWG 22-10 (green, yellow). This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap.

The part number is a reference to the die set without frame.



Die profile



Crimp profile

TECHNICAL DATA

Length: 29 mm/1.14"
Width: 10 mm/0.39"
Height: 39 mm/1.54"
Weight: 65 gr/0.14 lb
Wire size: 0.32-6 mm² / AWG 22-10
Crimp dimensions mm/mm²:
 0.32 - 0.75 mm²/4 - 6 mm²
Crimp dimensions inch/AWG:
 AWG 22 - AWG 18/AWG 12 - AWG 10
Connector: Heatshrink
Description: For pre insulated green, yellow heat shrink connectors.
Life span, cycles: 20,000



Following dies are also available:

Pressmaster AB
P.O. Box 3, Industrivägen
SE-796 21 Älvdalen, Sweden
Tel: +46 (0)251-451 00
info@pressmaster.se
www.pressmaster.com




Mobile die set/4300-3258/AAA


Mobile die set for insulated heat shrink butt splice connectors, 0.5-2.5 mm²/AWG 22-14 (red, blue). This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap

The part number is a reference to the die set without frame.



Die profile



Crimp profile

TECHNICAL DATA

Length: 29 mm/1.14"
Width: 10 mm/0.39"
Height: 39 mm/1.54"
Weight: 66 gr/0.15 lb
Wire size: 0.5-2.5 mm² / AWG 22-14
Crimp dimensions mm/mm²:
 0.5 - 1.5 mm²/1.5 - 2.5 mm²
Crimp dimensions inch/AWG:
 AWG 22 - AWG 16/AWG 16 - AWG 14
Connector: Heatshrink
Description: For pre insulated red, blue heat shrink connectors.
Life span, cycles: 20,000



Following dies are also available:

Pressmaster AB
P.O. Box 3, Industrivägen
SE-796 21 Älvdalen, Sweden
Tel: +46 (0)251-451 00
info@pressmaster.se
www.pressmaster.com